

# AD 600

Doosan  
Mecc Alte  
D+ &



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$%

CE

2000/14/EC

&\$\$\$#( #

z) \$' z' z' D:

	"	"	"	"	Amp
400/230	600,00	480,00	500,00	400,00	721,00

fPQDE

GC ; ) &

) & z

fDF DE

\$\$\$%

\$\$\$%

GC " \$(\*"

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D; A Z'5JF

## TRANSFER SWITCH

# AD 600

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan		
Model	P180LE		
		%\$\$' "# "	
		(- *\$\$' "	
		0*) \$\$< DQ	
	L	18,300	
	"	128 x 142	
		15,0:1	
	fl # ı	"# "	1500
	fl ı	L	35,00
		L	94,00
AbsorbedAirDischargeReSourceKey.Text	' # "	31,60	
	' # "	565,00	
fl ' # ı	' # "	98,00	
	° C	580,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
	# "	)\$ı	
		111,60	81,30 54,80


	Mecc Alte		
	ECO40-1L/4		
	Hz	50	
	"	550,00	
7cg'		0,80	
		3	
	fl ı	400/230	
	A	793,00	
Temperature		H	

		fl ı		fl ı	
	"	"	"	"	L
AD 600	3530,00	3205,00	1550,00	2030,00	850,00
		fl ı		fl ı	
	"	"	"	"	L
MS 80	4725	4750	1560	2490	850

# AD 600

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

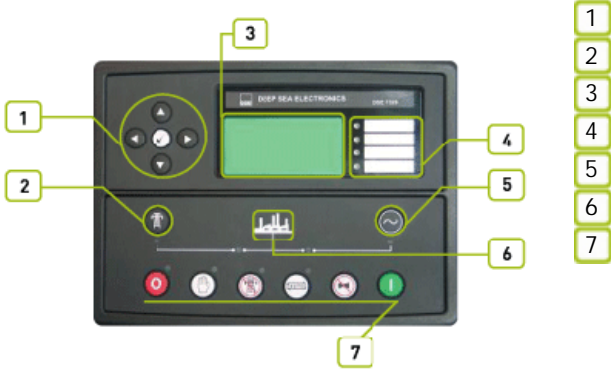

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$ž ž "8G9+' &\$ž 8G9+' &\$ž ž " % &1 \* ( ž F G & ž F G ( , ) ž ž

# AD 600

Doosan  
Mecc Alte  
D+ &''

f@#@Bl  
f@#@Bl

"z" "z"

f@#@Bl

971

f&%) +L

f&)(, L

f&% \$L

6G'9B '\*\$-\$)'\$

6G'9B '\*%\$\$\$!\*!&

6G'9B '\*%\$\$\$!\*!(

GA 8

%, !&\*('

&(\$)

!&+''

# AD 600

Doosan  
Mecc Alte  
D+ &



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1560
fl "L	"	4750
fl "L	"	2490
	L	850