


# AD 275

Doosan  
Mecc Alte  
D+ &



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$%



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	275,00	220,00	250,00	200,00	360,00

fP GDE

GC ; ) &

) & z

fDF DE

%\$!

% %&

GC " \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D; A Z 5JF

## TRANSFER SWITCH

# AD 275

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan		
Model	P126TI		
		%\$\$' "# "	
		&+&\$\$' "	
		0*( &\$\$<DQ	
	L	11,050	
	"	123 x 155	
		17,0:1	
	fl # ı	"# "	1500
	fl ı	L	23,00
		L	65,00
AbsorbedAirDischargeReSourceKey.Text	' # "	16,40	
	' # "	295,00	
fl ' # ı	' # "	43,00	
	° C	560,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
	# "	)\$ı	
		53,30	40,00 27,50

	Mecc Alte		
	ECO 38-1LN		
	Hz	50	
	"	250,00	
7cg'		0,80	
		3	
	fl ı	400/230	
	A	360,00	
Temperature		H	

		fl ı		fl ı	
	"	"	"	"	L
AD 275	2265,00	2950,00	1300,00	1588,00	450,00
		fl ı		fl ı	
	"	"	"	"	L
MS 60	2940	4000	1300	1970	450



# AD 275

Doosan  
Mecc Alte  
D+ &

f@#@Bt  
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B '\*\$-\$)'\$

6G'9B '\*%\$\$\$!\*!&

6G'9B '\*%\$\$\$!\*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AD 275

Doosan  
Mecc Alte  
D+ &''

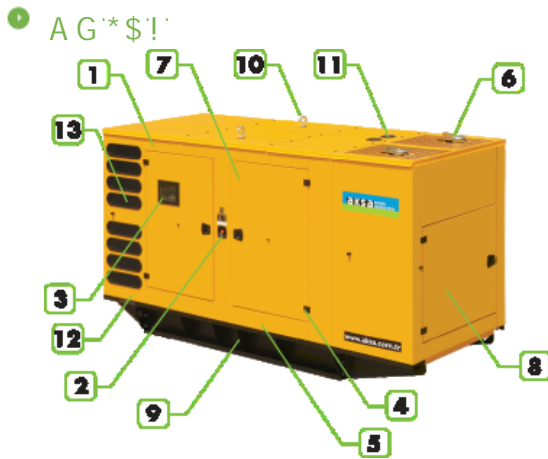

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1300
fl "L	"	4000
fl "L	"	1970
	L	450