

AC 700

Cummins
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC
&\$\$#(#
z) \$ z'z' D:

	"	"	"	"	Amp
400/230	700,00	560,00	638,00	510,00	920,00

fDGD' GC,) &
,) & z fDF D' %s' % %& GC "\$(* z&(GC

Standard Specifications

z
fl ! E
z
z

ALTERNATOR

fl " E
fD \$ \$ \$ \$ E
fl " \$ E

TRANSFER SWITCH

fl " \$ E

AC 700

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		VTA 28 G5		
		%\$\$' "# "		
		*%&\$\$' "		
		Q&\$\$< DQ		
	L	28,000		
	"	140 x 152		
		13,1:1		
	fl # ı	"# "	1500	
	fl ı	L	83,00	
		L	170,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	52,68		
	' # "	651,00		
fl ' # ı	' # "	122,88		
	° C	507,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "	140,00	104,00	73,00


		Mecc Alte
		ECO 40-2L
	Hz	50
	"	680,00
7cg'		0,80
		3
	ıfl ı	400/230
	A	981,00

		ıfl ı		ıfl ı	
	"	"	"	"	L
AC 700	5470,00	3740,00	1550,00	2266,00	1000,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 85	7030,00	5297	1606	2656	1000

AC 700

Cummins
Mecc Alte
D+' &'

1 D+' &'

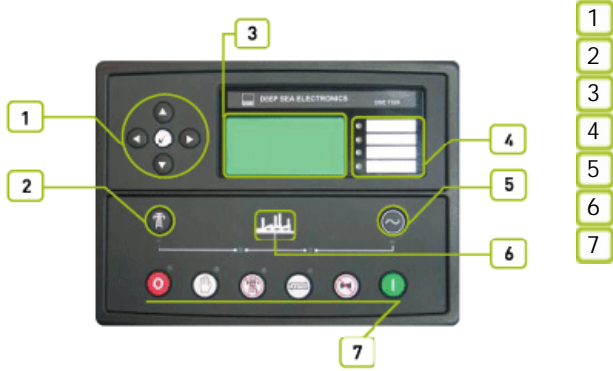

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5


8G9+' &\$ž &&\$' ž

8G9+' &\$ž 8G9+' &\$ž

% &1 *(' žFG&' &žFG(,) ž


AC 700

Cummins
Mecc Alte
D+ &

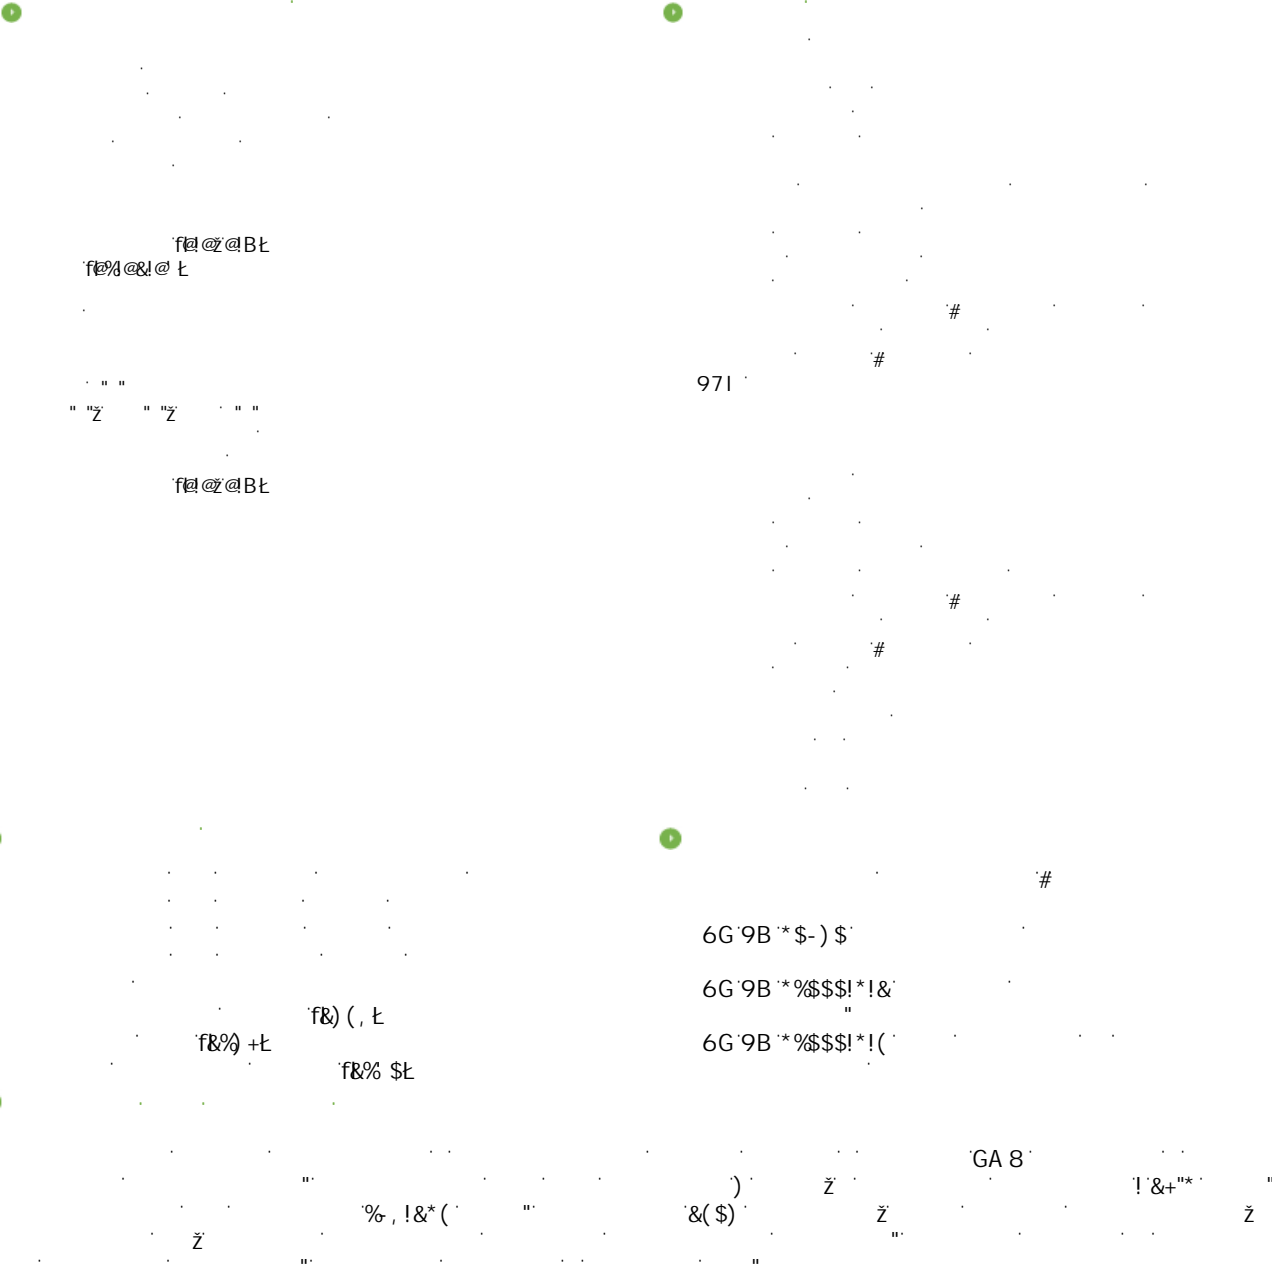

AC 700

Cummins
Mecc Alte
D+ &

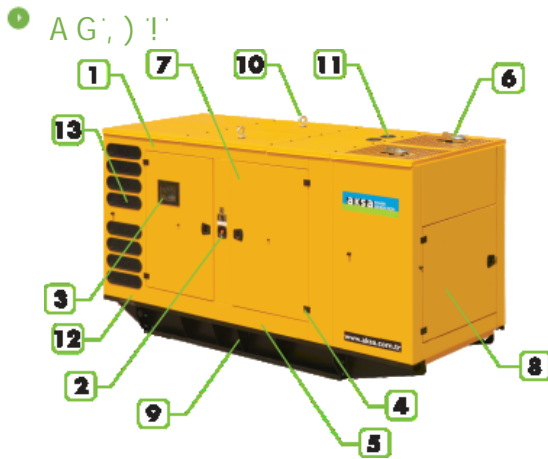

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000