

AC 825

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins														
Model		VTA 28 G6														
		<table border="1"> <tr> <td>%\$\$' "# "</td> <td></td> <td></td> <td></td> </tr> <tr> <td>+&&\$\$' "</td> <td></td> <td></td> <td></td> </tr> <tr> <td>G*, \$\$\$<DQ</td> <td></td> <td></td> <td></td> </tr> </table>			%\$\$' "# "				+&&\$\$' "				G*, \$\$\$<DQ			
%\$\$' "# "																
+&&\$\$' "																
G*, \$\$\$<DQ																
	L	28,000														
	"	140 x 152														
		13,1:1														
	fl # ı	"# "	1500													
	fl ı	L	83,00													
		L	170,00													
AbsorbedAirDischargeReSourceKey.Text	' # "	54,84														
	' # "	651,00														
	' # "	132,72														
	° C	489,00														
		24 V d.c.														
	Load	%\$\$ı	'+)ı)\$ı												
	# "	162,00	120,00	82,00												

		Mecc Alte		
		ECO40-VL/4		
	Hz	50		
	"	750,00		
7cg'		0,80		
		3		
	ıfl ı	400/230		
	A	1084,00		

		ıfl ı		ıfl ı	
	"	"	"	"	L
AC 825	5470,00	3740,00	1550,00	2266,00	1000,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 85	7480,00	5297	1606	2656	1000

AC 825

Cummins
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 825

Cummins
Mecc Alte
D+ & "

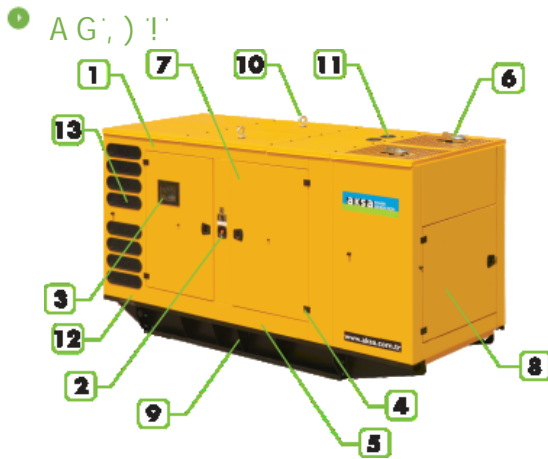

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000